

The Atlas Copco logo is positioned in the top right corner of the image. It consists of the brand name "Atlas Copco" in a white, serif font, centered between two horizontal white bars. The logo is set against a teal rectangular background.

FD 360-1675 Series

Refrigerant Dryers

Complete protection for your application

Compressed air entering the air net is always saturated. When it cools, the moisture will condense, causing damage to your air system and finished products. By removing moisture from compressed air with a pressure dewpoint (PDP) as low as +3°C / +37°F, our FD refrigerant dryers significantly reduce system failures, production downtime and costly repairs. The FD range has been designed in order to be fully integrated into an Atlas Copco smart AIR solution.



Air quality

FD refrigerant dryers are designed in-house. They meet or exceed international standards for compressed air purity and are tested according to ISO 7183:2007.



Efficiency

Internal pressure drop defines the efficiency of refrigerant dryers. Our units are designed to minimize pressure drop and efficiently removing moisture.



Sustainability

A design focused on efficiency combined with low service requirements contributes to a low total cost of ownership and reduced carbon footprint.



Engineered to enhance your profit

Ensuring the reliability of your operations is essential. Our FD dryers are tested according to ISO7183 certification that guarantees consistent quality with a supply of clean and dry air. Every component is optimized for long life and easy servicing to achieve smooth and efficient operations for your business.

FD 360-1675



1 Heat Exchanger

Inhouse designed for minimum pressure drop and maximum heat transfer. Integrated water separator removes nearly 100% of the condensate without usage of any consumables.



4 Refrigerant gas

R513A refrigerant gas provides an exceptional reliability for your compressor room. With a Global Warming Potential below 700, it offers a sustainable, future-proof refrigerant solution.



2 Elektronikon Mk5 Touch controller

The Elektronikon Mk5 Touch unit controller is specially designed to maximize the performance of your FD refrigerant dryer under all conditions.

The default integrated Smartlink makes the machine condition accessible any time, any place at the tip of your fingers.



5 Microchannel condenser

The condenser plays a critical role in the refrigerant circuit and is with his generous design able to handle even the most challenging operating conditions. The microchannel technology allows replacing the rather large tube and fin condensers to further reduce both carbon and floorspace footprint.



3 Compressor refrigerant

For the compressor the unit merges the unique feature of scroll technology to reduce the power consumption by 30% compared to traditional piston compressors. Scroll compressors also reduce noise and vibrations. Both fixed speed and VSD (Variable Speed Drive) versions are available.



6 Hot gas bypass + Thermostatic Expansion Valve

The hot gas bypass will avoid the risk on frost damage in the machine and is supported with an expansion valve to adjust cooling power of the refrigerant to the required dew point. Minimizing the risk on clogging with an adjustable valve, this design has proven itself over many years on both reliability and best in class efficiency.



8 Liquid separator

Right before the compressor a liquid separator makes sure only gas enters the compressor.



7 Electronic zero loss drains

For maximal reliability a mechanical drain with anti-sticking floater is selected together with the control in an IP65 enclosed box.



9 Refrigerant filter

To guarantee the most optimal efficiency throughout the years the refrigerant filter will remove whatever clogging might accumulate throughout the years of operation.



Energy efficiency

A unique combination of high-efficiency components, smart unit design and an advanced control system enables you to combine low pressure drop with a low power consumption. With an FD VSD refrigerant dryer, you can maximize your energy savings from the first minute of operation.

Components designed for efficiency



Heat exchanger

The heat exchanger has been designed to reduce the pressure drop and increases the performance of the dryer.



Mk5 Touch Controller

Our state-of-the-art controller uses a saver cycle control. Increasing energy efficiency due to smart regulation based on the dryer load.



Refrigerant compressor

By using a scroll refrigerant compressor this unit consumes an average of 30% less power than reciprocating/piston refrigerant compressors.



Electronic drain


The zero-loss drain only releases its moisture content when it reaches a pre-set level. Leaving a minimal amount of moisture, the IWD ensures no energy can escape as the receiver empties.

VSD (optional): driving down your energy cost

More than 80% of the dryer's total lifecycle cost is taken up by the energy it consumes. To cut your energy costs, we offer dryers with Variable Speed Drive (VSD) technology. VSD leads to major energy savings, reducing the energy consumption by about 35%, protecting the environment for future generations. In almost every production environment, compressed air flow fluctuates depending on time of the day, actual demand...

Additionally, inlet humidity & operating temperatures vary as well. VSD technology allows the FD VSD dryers to adapt and operate in the most energy efficient way at all operating conditions.



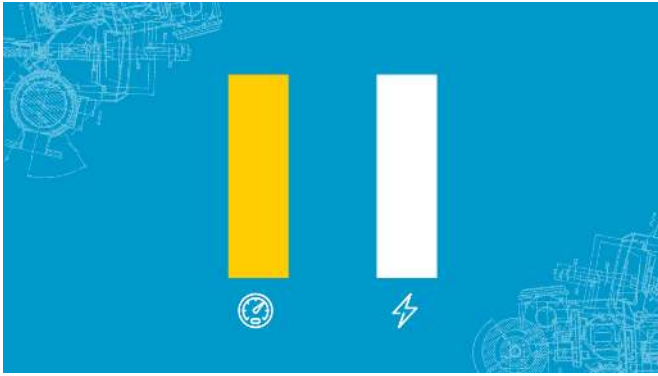

Low pressure drop


The lower the internal pressure drop of the dryer, the lower the pressure that you need to achieve with the air compressor, and the less energy the air compressor consumes. We have therefore put considerable efforts into minimizing pressure drop of the FD dryer.

Our FD dryers are designed to have a very low internal pressure drop thereby minimizing the compressor power consumption.

Low total cost of ownership

A unique combination of highly efficient components, a variable speed drive, an advanced control system and refrigerant technology allows you to use a reliable way to bring the dewpoint down to 3°C / 38°F with minimum energy.

From service perspective the activities are limited to cleaning the unit and inspecting the drain.

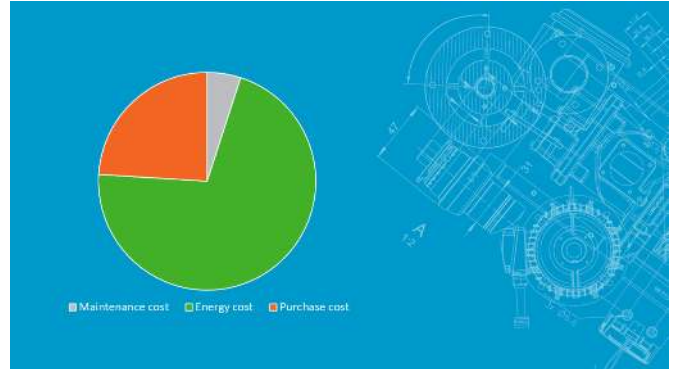

A step ahead in monitoring and controls

It is not only components using cutting edge technology that define the ultimate energy efficiency of the FD and FD VSD dryers it is also how these components are sized and regulated during operation.

FD dryers can be equipped with the Elektronikon® Mk5 touch unit controller that is designed to be compatible with our air compressors and avoid energy losses.

The Elektronikon® Touch controller is specially designed to maximize the performance of your FD refrigerant dryer under a variety of conditions. It provides you with increased energy efficiency, lower energy consumption and reduced maintenance times.

Installation

Smart AIR Solutions are a complete air or gas solution designed to provide our customers with the lowest life cycle costs for their equipment.



1 Compressors

Often people buy the same size compressor, but to optimize the system it's better to make a combination of different size compressors, technologies and controls. Compressors come in all size and variants, but in almost all cases we need to dry the air to avoid downstream corrosion or end product contamination. This can be realized by a full feature dryer integrated in the compressor or with a standalone dryer allowing you to size it for your specific operating conditions.

2 Downstream air treatment

Besides dryers Atlas Copco offers a broad spectrum of products for air treatment. The filter range can successfully remove oil, water and dust from basic filtration up to the level of sterile filtration. The Atlas Copco gas generators offer a broad scope of products in on site oxygen and nitrogen generation.

3 Central controller

Having a central controller reduces the required average pressure band which results in a lower average operating pressure of your machines. By reducing the pressure by 1 bar (or 14.5 psi), your energy usage lowers by 7%. By reducing the pressure by 1 bar (or 14.5 psi) decreases air leakages by 13%. Multiple embedded functions in the Optimizer 4.0 in which pressure, capacity and speed can be regulated.

4 SMARTLINK

[Monitor your compressed air installation with SMARTLINK](#)

Knowing the status of your compressed air equipment at all times is the surest way to achieve optimal efficiency and maximum availability.

[Go for energy efficiency](#)

Customized reports on the energy efficiency of your compressor room.

[Increase uptime](#)


All components are replaced on time, ensuring maximum uptime.

[Save money](#)

Early warnings avoid breakdowns and production loss.

Flowchart

Engineered with premium components, working principle of air-cooled version of FD series guarantees long-lasting durability and consistent operations.

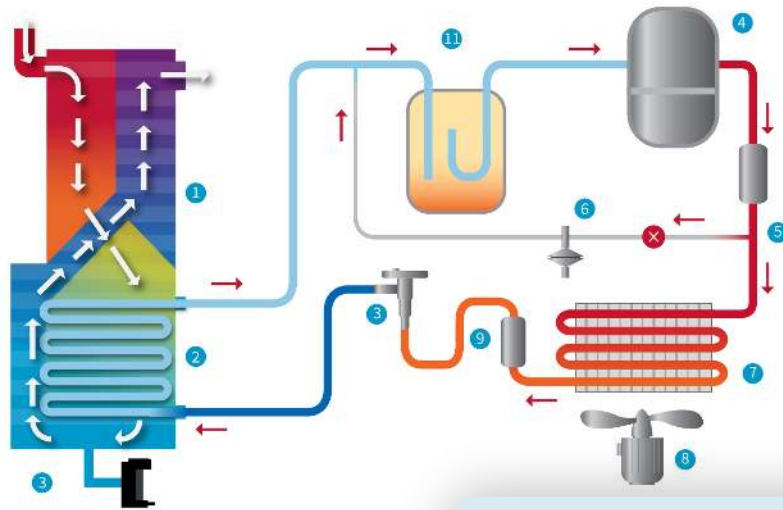

Color gradient change as indicated below:
Light blue: Low pressure, refrigerant gas
Dark blue: Low pressure, cold refrigerant gas
Red: High pressure, hot refrigerant gas
Orange: High pressure refrigerant liquid

1. Air to air part Heat exchanger

Incoming compressed air is cooled down by the outgoing dry cold compressed air.

2. Integrated water separator

The compressed air is cooled to the required dewpoint by the refrigerant. The water vapor condenses into water droplets.

3. Integrated water separator

The moisture is collected and evacuated by the electronic zero loss drain.

4. Refrigerant compressor

The refrigerant compressor compresses the gaseous refrigerant to a higher pressure.

5. Oil separator

Filters compressor oil from refrigerant and guides it back to the compressor.

6. Hot gas bypass valve

The hot gas bypass valve prevents the heat exchanger from freezing at lower load conditions.

7. Refrigerant condenser

The refrigerant condenser cools the refrigerant so that it changes from a gas to a liquid.

8. Fans air cooled versions

The fans generate the required cooling air flow.

9. Refrigerant filter

The refrigerant filter protects the entire system from water and solid particles.

10. Expansion valve

The thermostatic expansion valve further reduces the pressure which cools the refrigerant.

11. Liquid separator

The liquid separator ensures that only gaseous refrigerant enters the compressor, avoiding cavitation in the refrigerant compressor.

Scope of supply

Air treatment	Inlet and outlet connections: DIN/ANSI flanges – BSPT/NPT thread
	Heat exchanger with integrated water separator
	400/3/50 and 380-460-575/3/60 electrical connection
	Electrical approval: IEC / cULus
	Zero loss condensate drain
Refrigerant	R513A
Unit control	Controller: Basic on and off – Elektronikon Mk5 Touch
	IP54 protection
	Voltage free contacts for remote alarm / warning signals
Connectivity	Smartlink
Framework	Base frame with forklift slot holes
	Unit canopy

Additional features and options

- Pre-setting of controller for imperial or metric usage
- Transportation protection

Technical specifications – 50Hz

FD fixed-speed Metric

Model	Inlet flow		Power	Pressure drop	Inlet/outlet connections	Suggested prefilter	Refrigerant	CO2 equivalent	Dimensions			Weight	
	l/s	m3/hr	kW	mbar	DIN PN16 / ANSI 150#	DD+ / UD+	R513A	ton CO2	width	length	height	kg	
							kg		mm				
FD 360	360	1296	3.1	200	G 3"	360	2,0	1,2	1020	1124	1399	285	
FD 460	460	1656	3.5			525	3	1,9		1112	1596	350	
FD 530	530	1908	4.2			630	3,3	2,1		1114	1826	361	
FD 660	660	2376	5.0		DN100	860	5	3,1		1524	630	447	
FD 880	880	3168	6.2			1050	6,3	3,9		1005	1011		
FD 1000	1000	3600	6.3			1260				1833	1231		
FD 1190	1190	4284	7.3		DN150	1600	10,5	6,5		1455	1979	1833	1005
FD 1400	1400	5040	8.7				8,7	5,4					1011
FD 1675	1675	6030	12.2				11	6,8					1231

FD fixed-speed Imperial

Model	Inlet flow		Power	Pressure drop	Inlet/outlet connections	Suggested prefilter	Refrigerant	CO2 equivalent	Dimensions			Weight
	cfm	hp	psi	DIN PN16 / ANSI 150#	DD+ / UD+	R513A	ton CO2	width	length	height	lbs	
						lbs		inch				
FD 360	763	4,2	2.9	G 3"	360	4,3	2,7	40,2	44,3	55,1	628	
FD 460	975	4,7		G 3"	525	6,6	4,1		43,8	62,9	772	
FD 530	1123	5,6		G 3"	630	7,3	4,5		43,8	62,9	796	
FD 660	1398	6,7		DN100	860	11	6,8		43,9	71,9	985	
FD 880	1864	8,2		DN100	1050	13,9	8,7		60,1	71,9	1389	
FD 1000	2119	8,4		DN100	1260		8,7		71,9	1389		
FD 1190	2522	9,8		DN150	1600	23,1	14,4		57,3	78,0	71,9	2216
FD 1400	2967	11,7		DN150		19,2	12,0				71,9	2229
FD 1675	3549	16,4		DN150		2100	24,3				15,1	72,2

Reference conditions: Performance data per ISO 7183:2007

Ambient temperature: 25°C, 77°F

Inlet compressed air temperature: 35°C, 95°F

Inlet pressure: 7 bar(e)/102 psig

Inlet humidity: 100% RH

Outlet pressure dewpoint: 3°C / 37.4°F

FD VSD Metric

Model	Inlet flow		Power	Pressure drop	Inlet/outlet connections	Suggested prefilter	Refrigerant	CO2 equivalent	Dimensions			Weight
	l/s	m3/hr	kW	mbar	DIN PN16 / ANSI 150#	DD+ / UD+	R513A		ton CO2	width	length	
							kg	mm			kg	
FD 360 VSD	360	1296	2.5	200	G 3"	360	1.8	1.1	1020	1124	1399	235
FD 460 VSD	460	1656	2.6			525	2.9	1.8		1112	1596	330
FD 530 VSD	530	1908	3			630	3.3	2.1		1114	1826	345
FD 660 VSD	660	2376	4.6		DN100	860	4.7	2.9		1524	1826	405
FD 880 VSD	880	3168	5.4			1050	5.3	3.3		1826	505	
FD 1000 VSD	1000	3600	5.8			1260						

FD VSD Imperial

Model	Inlet flow	Power	Pressure drop	Inlet/outlet connections	Suggested prefilter	Refrigerant	CO2 equivalent	Dimensions			Weight
	cfm	hp	psi	DIN PN16 / ANSI 150#	DD+ / UD+	R513A		ton CO2	width	length	
						lbs	inch			lbs	
FD 360 VSD	763	3.4	2.9	G 3"	360	4	1,1	40,2	44,3	55,1	518
FD 460 VSD	975	3.5	2.9		525	6,4	1,8		43,8	62,8	728
FD 530 VSD	1123	4	2.9		630	7,3	2,1		43,9	71,9	761
FD 660 VSD	1398	6.2	2.9	DN100	860	10,4	2,9		60,0	71,9	893
FD 880 VSD	1864	7.2	2.9		1050	11,7	3,3		1113		
FD 1000 VSD	2119	7.8	2,9		1260	11,7	3,3		1113		

Reference conditions: Performance data per ISO 7183:2007

Ambient temperature: 25°C, 77°F

Inlet compressed air temperature: 35°C, 95°F

Inlet pressure: 7 bar(e)/102 psig

Inlet humidity: 100% RH

Outlet pressure dewpoint: 3°C / 37.4°F

Technical specifications – 60Hz

FD fixed-speed Metric

Model	Inlet flow		Power	Pressure drop	Inlet/outlet connections	Suggested prefilter	Refrigerant	CO2 equivalent	Dimensions			Weight			
	l/s	m3/hr	kW	mbar	DIN PN16 / ANSI 150#	DD+ / UD+	R513A	ton CO2	width	length	height	kg			
							kg		mm						
FD 360	360	1296	4,5	200	G / NPT 3"	360	2,0	1,1	1020	1124	1399	285			
FD 460	460	1656	5,0			525	3,0	1,7			1112	1596	350		
FD 530	530	1908	6,8			630	3,3	1,9				1596	361		
FD 660	660	2376	7,9		DN100 / 4"	860	5,0	2,9		1114	1826	447	630		
FD 880	880	3168	9,8			1050	6,3	3,6						1524	630
FD 1000	1000	3600	9,9			1260	6,3	3,6							
FD 1190	1190	4284	9,0		DN150 / 6"	1600	10,5	6,0		1455	1979	1005	1011		
FD 1400	1400	5040	13,5			1600	8,7	5,0						1833	1231
FD 1675	1675	6030	18,4			2100	11,0	6,3							

FD fixed-speed Imperial

Model	Inlet flow		Power	Pressure drop	Inlet/outlet connections	Suggested prefilter	Refrigerant	CO2 equivalent	Dimensions			Weight		
	cfm	hp	psi	DINPN16 / ANSI 150#	DD+ / UD+	R513A	ton CO2	width	length	height	lbs			
						lbs		inch						
FD 360	763	6	2,9	G / NPT 3"	360	4,3	2,5	40,2	44,6	55,1	628			
FD 460	975	6,7			525	6,6	3,8			44,2	62,9	772		
FD 530	1123	9,1			630	7,3	4,2				62,9	796		
FD 660	1398	10,6		DN100 / 4"	860	11	6,3		60,3	71,9	985	1389		
FD 880	1865	13,1			1050	13,9	8,0						1389	
FD 1000	2119	13,2			1260	13,9	8,0							
FD 1190	2522	12,1		DN150 / 6"	1600	23,1	13,2		57,3	78,0	2216	2229		
FD 1400	2967	18,1			1600	19,2	11,0						72,2	2714
FD 1675	3549	24,6			2100	24,3	13,9							

Reference conditions: Performance data per ISO 7183:2007

Ambient temperature: 38°C, 100°F

Inlet compressed air temperature: 38°C, 100°F

Inlet pressure: 7 bar(e)/102 psig

Inlet humidity: 100% RH

Outlet pressure dewpoint: 4°C / 39.2°F

FD VSD Metric

Model	Inlet flow		Power	Pressure drop	Inlet/outlet connections	Suggested prefilter	Refrigerant	CO2 equivalent	Dimensions			Weight
	l/s	m3/hr	kW	mbar	DIN PN16 / ANSI 150#	DD+ / UD+	R513A		ton CO2	width	length	
							kg	mm			kg	
FD 360 VSD	360	1296	4.8	200	G / NPT 3"	360	1.8	1,0	1020	1124	1399	235
FD 460 VSD	460	1656	5.3			525	2.9	1,7		1112	1596	330
FD 530 VSD	530	1908	5.8			630	3.3	1,9		1112	1596	345
FD 660 VSD	660	2376	6.4		DN100 / 4"	860	4.7	2,7		1114	1826	405
FD 880 VSD	880	3168	9.8			1050	5.8	3,3		1524		505
FD 1000 VSD	1000	3600	10.7			1260	5.8	3,3		1524		505

FD VSD Imperial

Model	Inlet flow	Power	Pressure drop	Inlet/outlet connections	Suggested prefilter	Refrigerant	CO2 equivalent	Dimensions			Weight
	cfm	hp	psi	DIN PN16 / ANSI 150#	DD+ / UD+	R513A		ton CO2	width	length	
						lbs	inch			lbs	
FD 360 VSD	763	6,5	2.9	G / NPT 3"	360	4	2,3	40,2	44,3	55,1	518
FD 460 VSD	975	7,1			525	6,4	3,7		43,8	62,8	728
FD 530 VSD	1123	7,8			630	7,2	4,1		43,8	62,8	761
FD 660 VSD	1398	8,6		DN100 / 4"	860	10,3	5,9		43,9	71,9	893
FD 880 VSD	1865	13,1			1050	12,7	7,3		60,0	71,9	1113
FD 1000 VSD	2119	14,4			1260	12,7	7,3		60,0	71,9	1113

Reference conditions: Performance data per ISO 7183:2007

Ambient temperature: 38°C, 100°F

Inlet compressed air temperature: 38°C, 100°F

Inlet pressure: 7 bar(e)/102 psig

Inlet humidity: 100% RH

Outlet pressure dewpoint: 4°C / 39.2°F



Atlas Copco AB
(publ) SE-105 23 Stockholm, Sweden
Phone: +46 8 743 80 00
Reg. no: 556014-2720



WWW.ATLASCOPCO.COM

